




# KONAVENT

## ISO Hose Aluminium Insulated Flexible Hose



- **Name:** Aluminium Insulated Flexible Hose
- **Sizes:** 102mm–254mm
- **Temperature:** -30° / 150°C
- **Max Air Velocity:** 30m/sec
- **Pressure:** 2500Pa
- **Material:** Multi-layer aluminium/ polyester laminate with embedded flexible wire spring. Inner 16kg/m<sup>3</sup> quality insulation glass wool.
- **Length:** 10m as standard

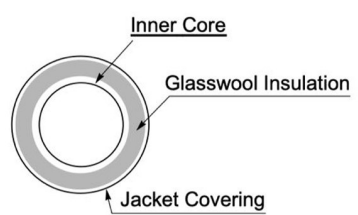

Product Code	Inner Ø	Length
ISO102-2.0	102mm	10m
ISO127-2.0	127mm	10m
ISO152-2.0	152mm	10m
ISO203-2.0	203mm	10m
ISO254-2.0	254mm	10m

Full range of flexible thermal insulated ducting for preventing condensation when there's temperature difference in airflow of ventilation system.

- Helpful for reducing heat & cool loss and preventing condensation
  - Insulation: standard 16kg/m<sup>3</sup> quality insulation glass wool